


Good looking ducts - with or without air

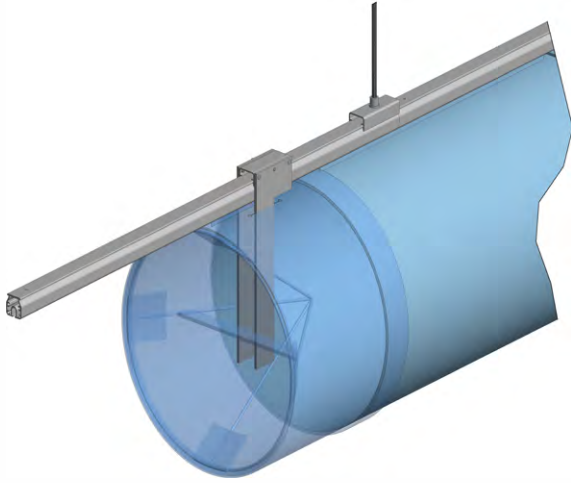

The SafeStretch® system will keep the textile duct round and taut at all times with or without air pressure.


Safe 360 rings and SafeStretch® support the duct to maintain inflated appearance at all times.

- Internal structure while still keeping a generally unobstructed airflow
- Eliminates inflation pop
- Eliminates sagging
- Eliminates wrinkles
- Suspension with single Safetrack for dimensions Ø200-Ø1270 mm
- Maintains textile duct benefits like light weight, draught-free air distribution, healthy indoor climate, etc.

WITHOUT AIR



WITH AIR

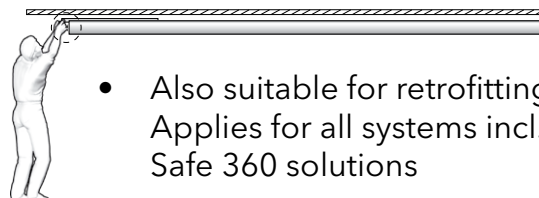


- Also suitable for retrofitting
Applies for all systems incl.
Safe 360 solutions



Good looking ducts - with or without air

1. Install the duct with 360 rings (B). The rings must be fitted every metre
2. Insert the SafeStretch® Fastener (A) under the clamp at the duct inlet
3. Zip in the SafeStretch® Bottom complete with the SafeStretch® Ring (C1) fixed with push buttons
4. Insert the SafeStretch® Bracket (C2) from the top, into the duct, through the 2 holes in the fabric, and make sure it is positioned in front of the flat steel part (see C)
5. Turn on the air
6. Stretch the duct using the Safestretch® Bracket, and secure it, when the duct has the desired look

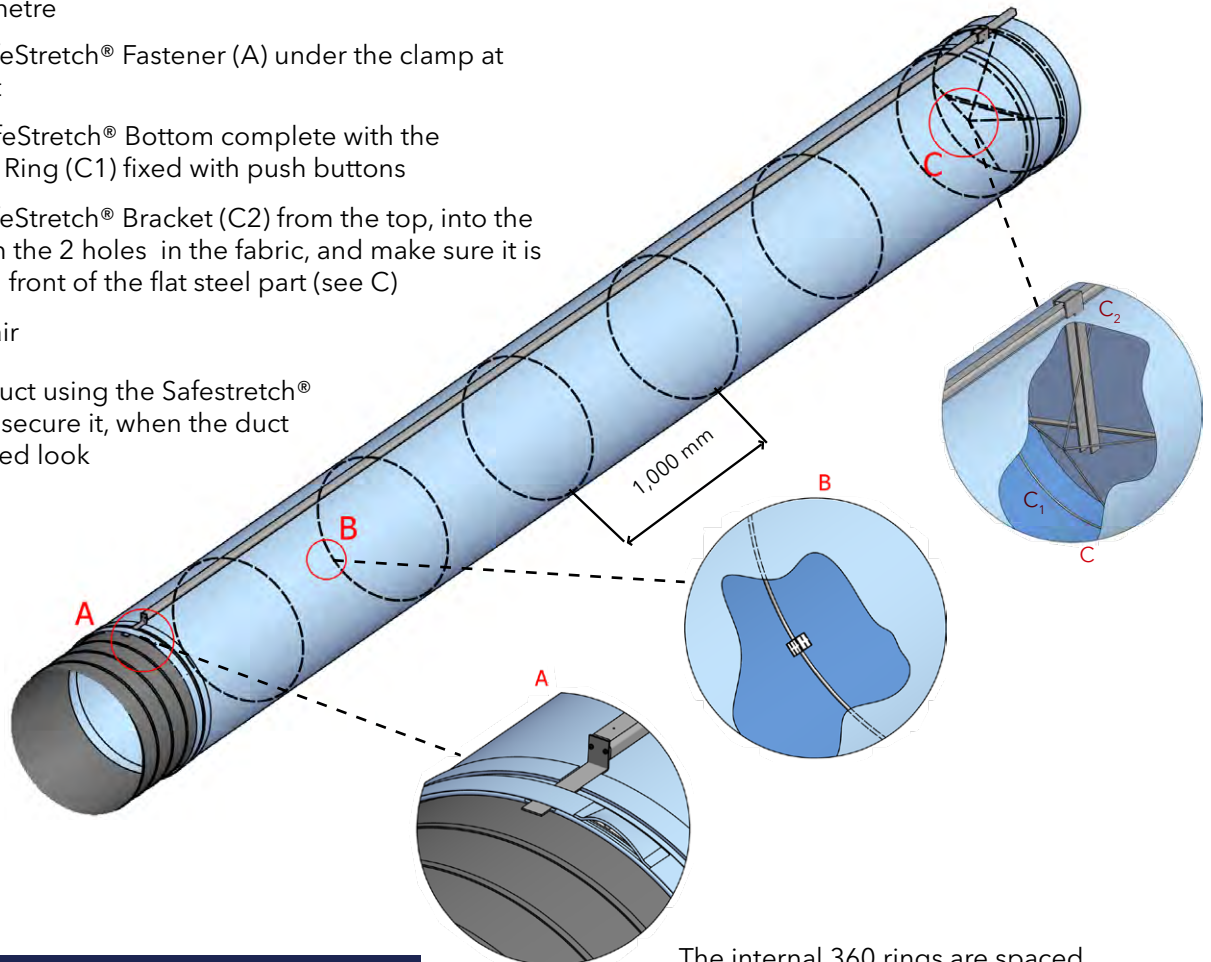

The internal 360 rings are spaced at 1 metre in order to keep a fully inflated appearance at all times.

SafeStretch® is only required every 25 to 30 metres compared to the competition at 10 to 15 metres making it the most cost effective and simplest system to install.

Scan the code to watch the film.



FILM

01/2020

