



Duct Arch
Mounting System
(Clips & Wire)



Please note that the Duct Arch is installed in internal pockets through an opening on the outside of the duct.

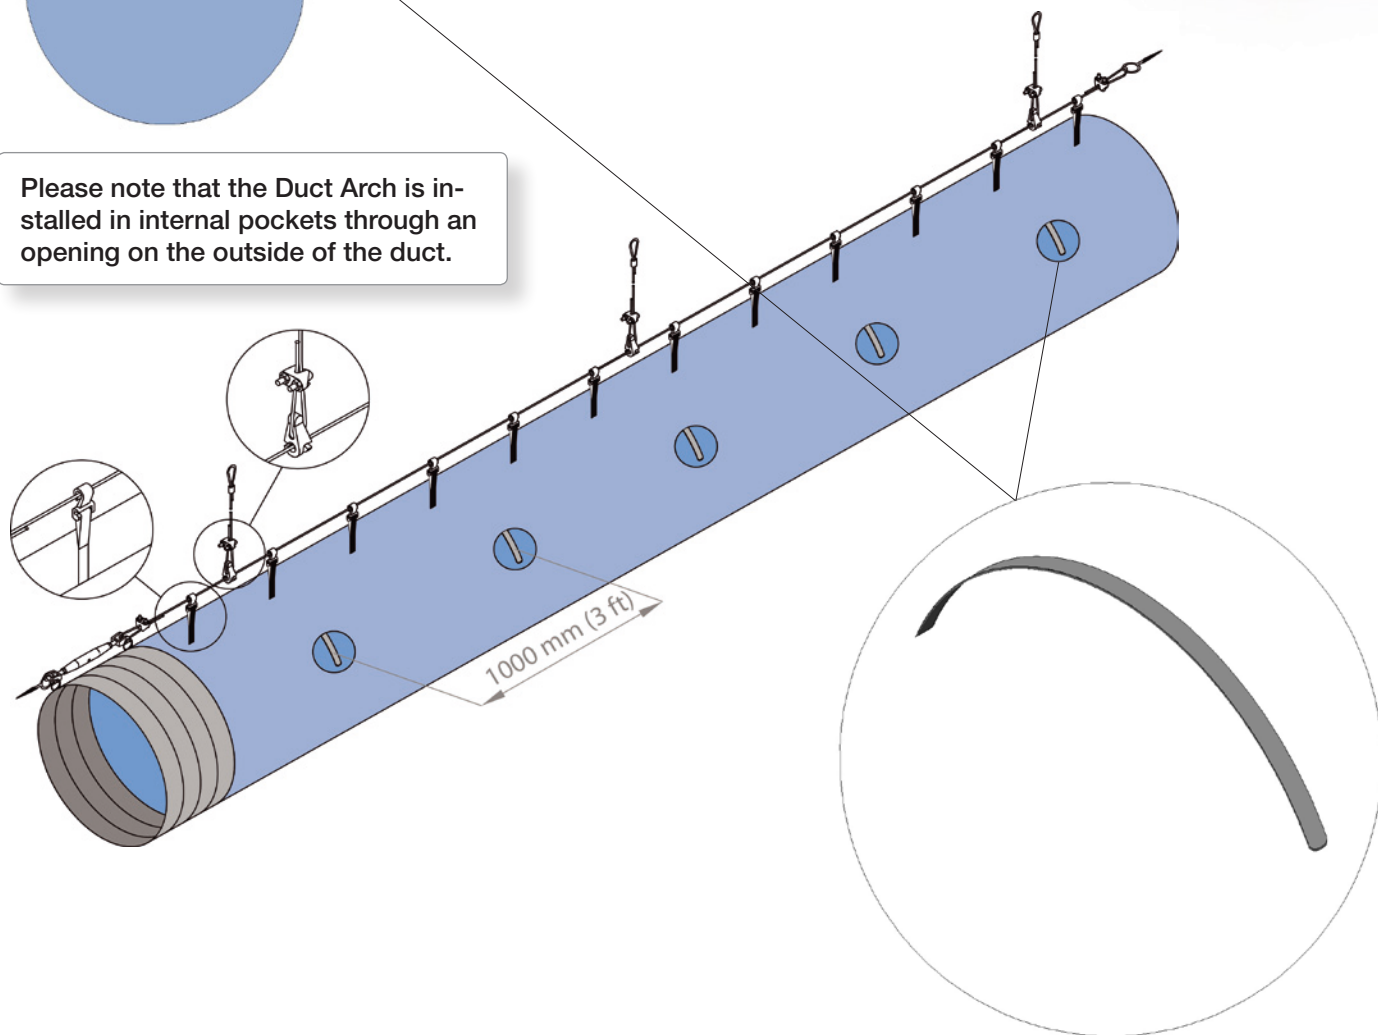

Duct Diameter		Weight		Reduction in sagging
[mm]	[inch]	[g]	[oz]	[%]
400	16	97	3,5	25
450	18	108	3,9	25
500	20	120	4,3	25
560	22	135	4,8	25
630	25	151	5,4	25
710	28	170	6	25
800	32	191	6,8	25
900	35	215	7,6	25
1100	43	262	9,3	25
1200	47	286	10,1	25
1220	48	291	10,3	25

1

Install the duct according to the standard mounting installation supplied with the duct system.

2

The Duct Arch concept consists of curved aluminium arches that are inserted into prefabricated pockets in the upper side of the duct for every 3 ft/1000 mm. The arches are **not** preinstalled from the factory.

3

Slide the Duct Arch into the pocket, either before or after inflating the duct.

