
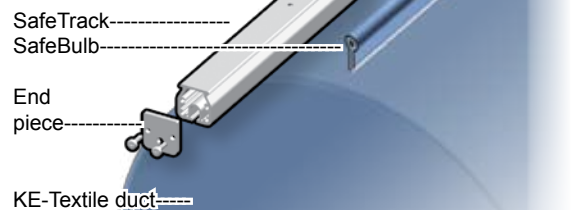
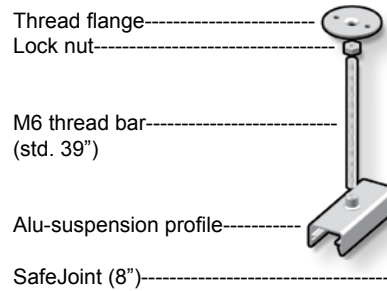
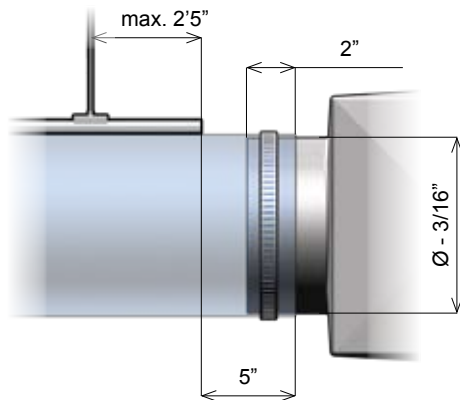
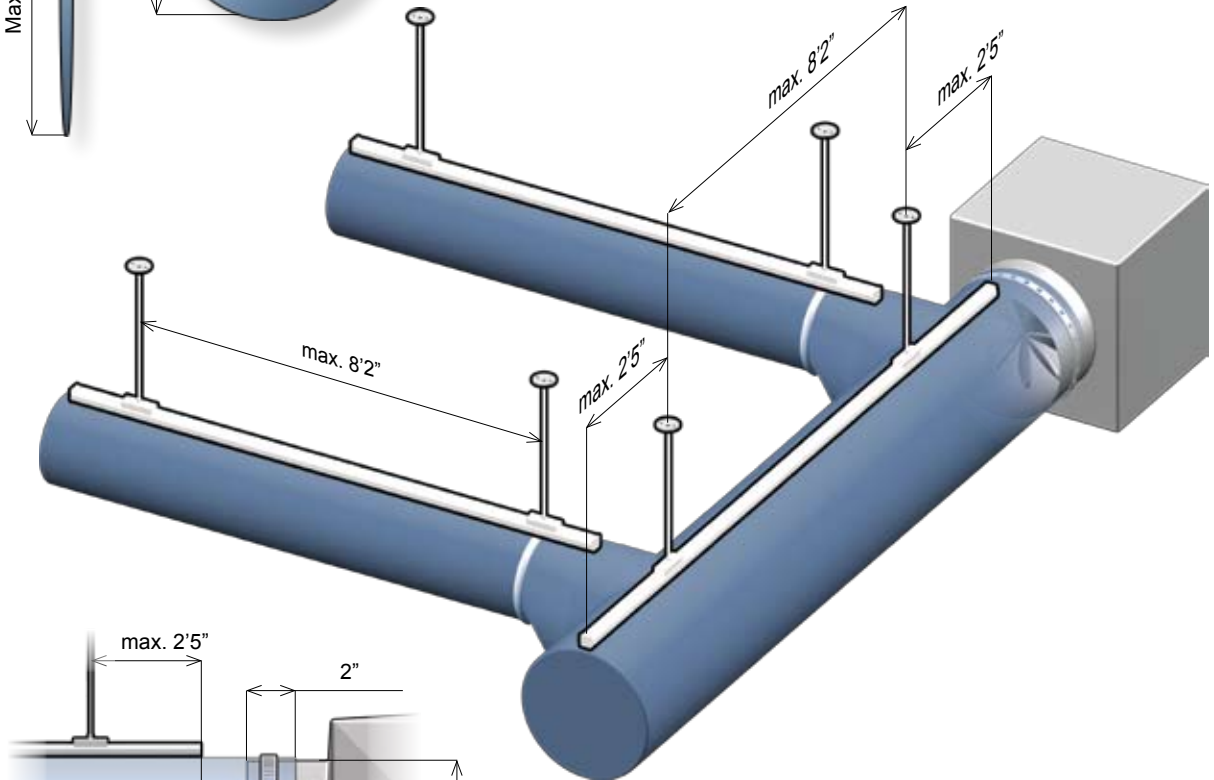


SafeTrack

Single suspension

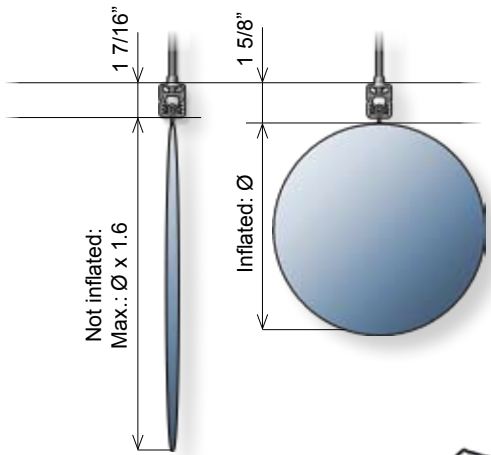

The SafeTrack is supplied in cut lengths to match the textile duct and is packed with the necessary components and marked individually with exact indication of placement.


KE Fibertec recommend single-suspended SafeTrack for ducts up to Ø 36".

Thread bars as standard are supplied in 39" lengths. Different lengths available on request.

Not included in the delivery: Screws for ceiling attachment.




Safe 360°
Mounting System
SafeTrack

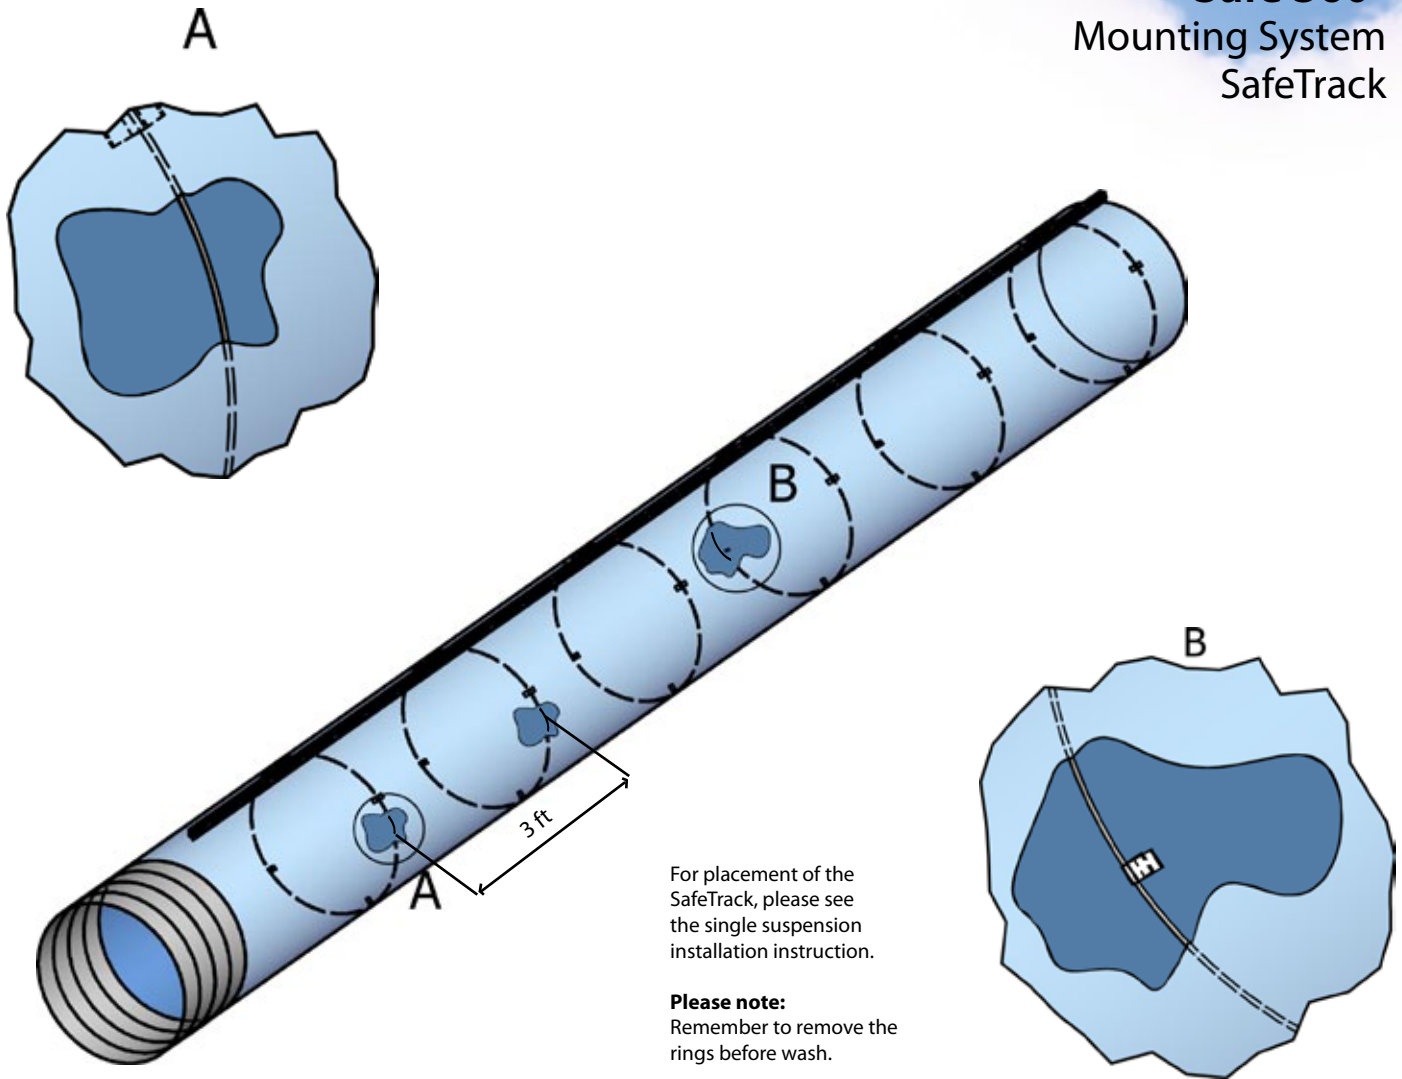

YouTube™



KE Fibertec

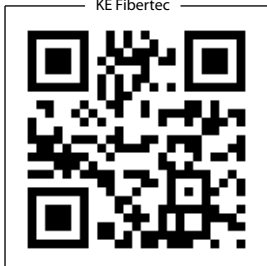

Scan the code with your smartphone and watch the installation guide on the KE Fibertec YouTube channel.

1

Install the duct according to the standard mounting installation supplied with the duct system.

2

The Safe 360° concept consists of stainless steel rings placed internally in the fabric duct for every 3 ft (A). Ring size is 1/8" for duct diameters 8" to 24" and 5/32" for duct diameters 26" to 36". The rings are preinstalled from the factory, however, for sizes >20" installation must be done on site.


3

The rings are held in place by velcro straps (B) for easy removal should maintenance/washing be necessary.



SafeTrack

Alternative suspensions

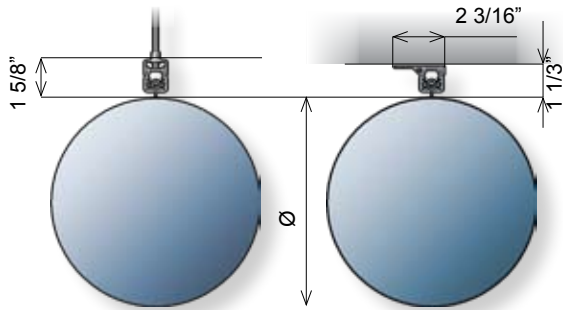

SafeTrack is clicked directly into the **SafeCeil** for convenience and is designed for mounting the textile duct close to the ceiling.

Max. span between supports is 6'6".

SafeThread as standard is supplied with 39" thread bar with expansion bolt for concrete or bolt screw for wood fixing.

Also available in stainless steel AISI 304 or AISI 316.

Max. span between supports is 8'2".

SafeStrap-Up as standard is supplied with 39" Ø3/4" aluminium tube and top flange. Recommended for textile ducts in Ø > 35# or for applications requiring long suspension systems.

Also available in 20", 59" and 79" length.

Max. span between supports is 8'2".

SafeWire Strap-Up as standard is supplied with 39" cable with loop to be attached to a hook in the ceiling (not included).

Also available in 79" length.

Max. span between supports is 8'2".

