


SafeTrack

Alternative suspensions

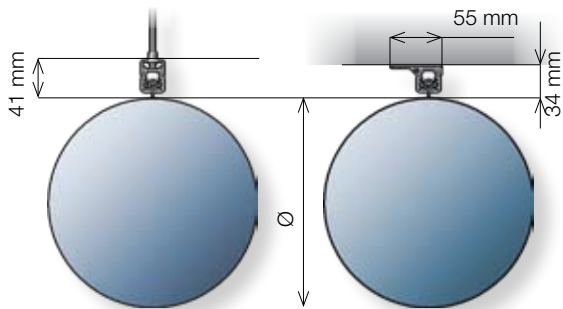

SafeTrack is clicked directly into the **SafeCeil** for convenience and is designed for mounting the textile duct close to the ceiling.

Max. span between supports is 2 m.

SafeThread as standard is supplied with 1 m thread bar with expansion bolt for concrete og bolt screw for wood fixing.

Also available in stainless steel AISI 304 or AISI 316.

Max. span between supports is 2.5 m.

SafeStrap-Up as standard is supplied with 1 m Ø 22 mm aluminium tube and top flange.

Recommended for textile ducts in $\text{Ø} > 900 \text{ mm}$ or for applications requiring long suspension systems.

Also available in 0.5 m, 1.5 m and 2 m length.

Max. span between supports is 2.5 m.

SafeWire Strap-Up as standard is supplied with 1 m wire with loop to be attached to a hook in the ceiling (not included).

Also available in 2 m length.

Max. span between supports is 2.5 m.

