
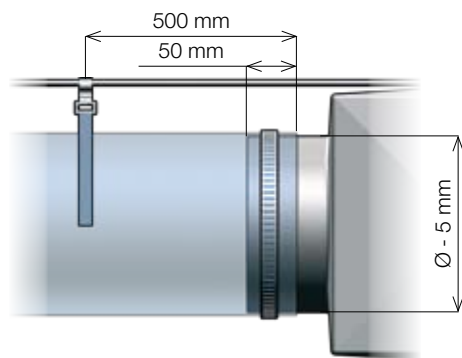


# Wire

## Triple suspension

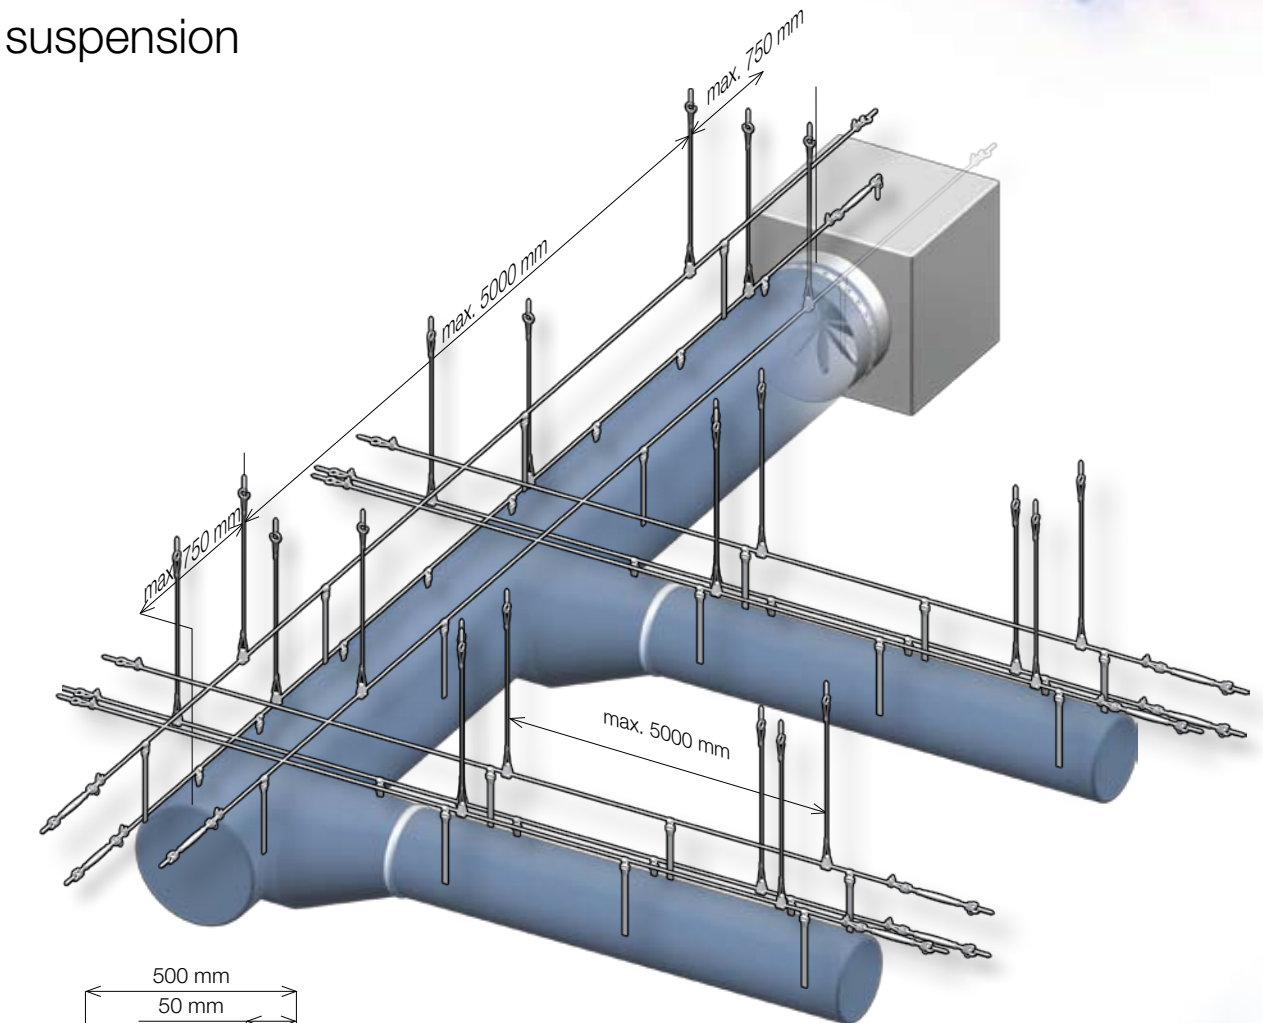

KE Fibertec suggest that double wire suspension be used for diameters of more than Ø 630 mm. For very large ducts triple wire suspension is suggested.

Wire is supplied 3 m longer than the duct. For ducts exceeding 17 m 2 turnbuckles per wire are included.

WireStrap-Ups to the ceiling as standard are supplied in 1 m lengths. Different wire lengths are available upon request.

Not included in the delivery: Screws/hooks for ceiling and wall attachment.

