
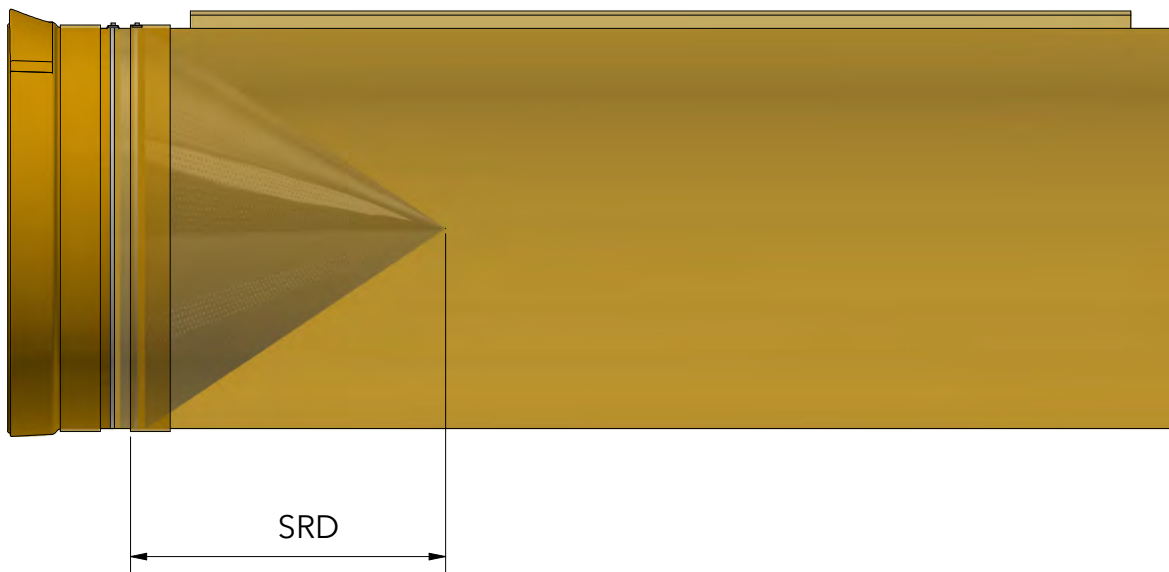


Safetrack, KE-SRD 25

OS-0013-GB-03

With or without zipper


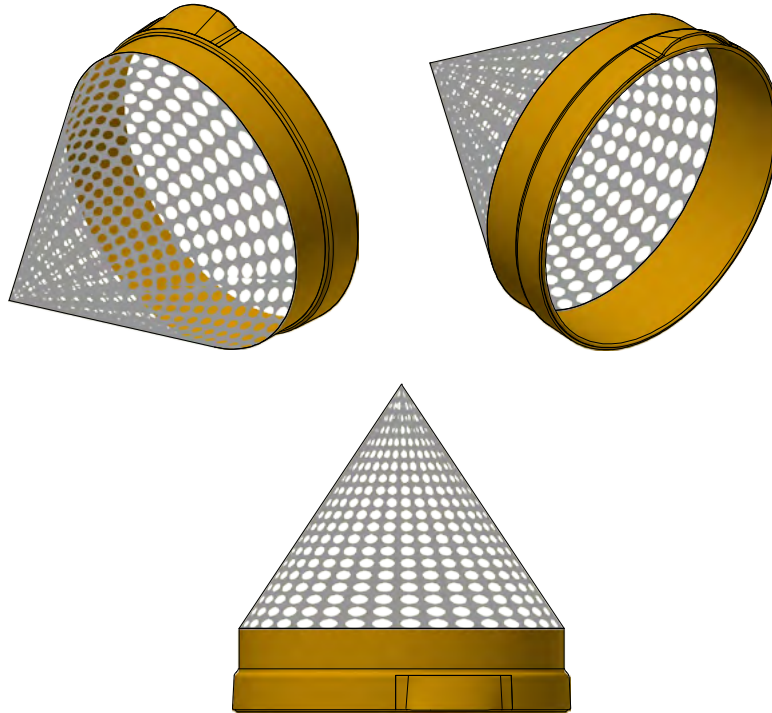


Safetrack, Safe 360, Single Suspension




OS-0014-GB-02

AIR THE WAY YOU WANT

Lock at 12 o'clock if duct diameter exceeds 399 mm

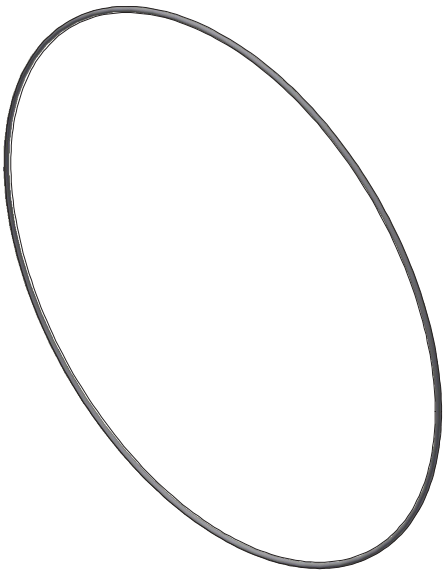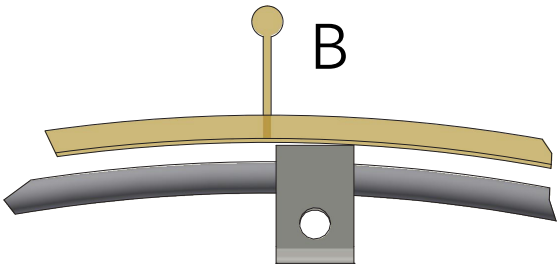


Duct diameter	Ring size
Ø200-Ø630 mm:	3 mm
Ø631-Ø1270 mm:	4 mm

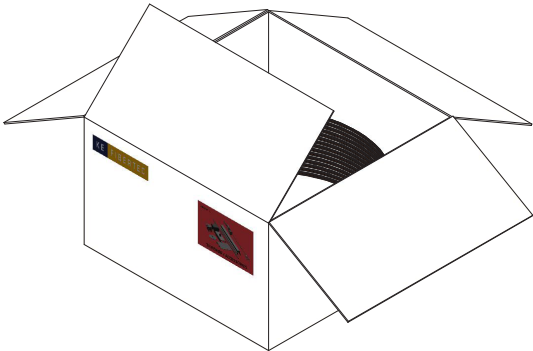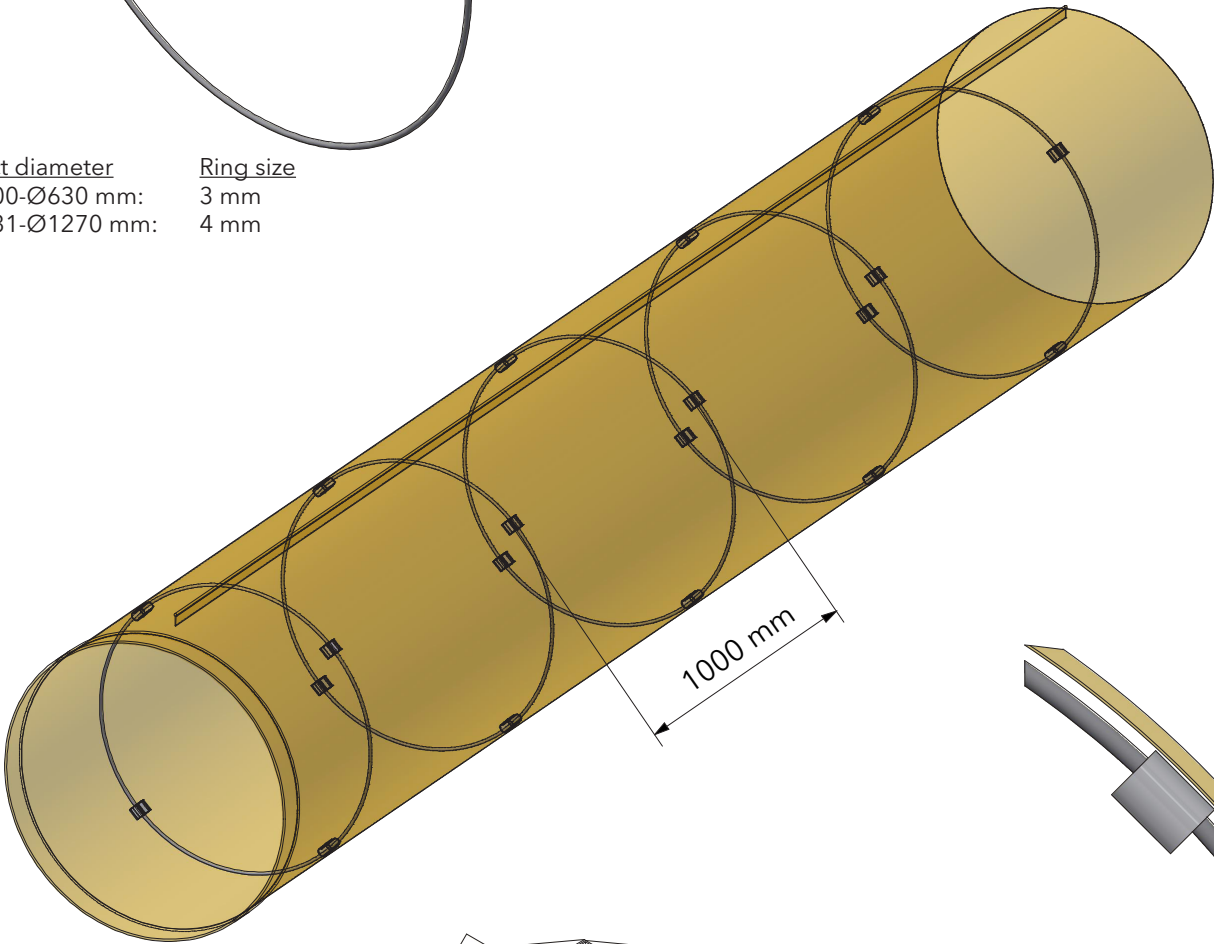

If duct diameter exceeds 500 mm rings are included separately (to be installed on site)



Safetrack Duct Arch, Single Suspension

OS-0016-GB-02

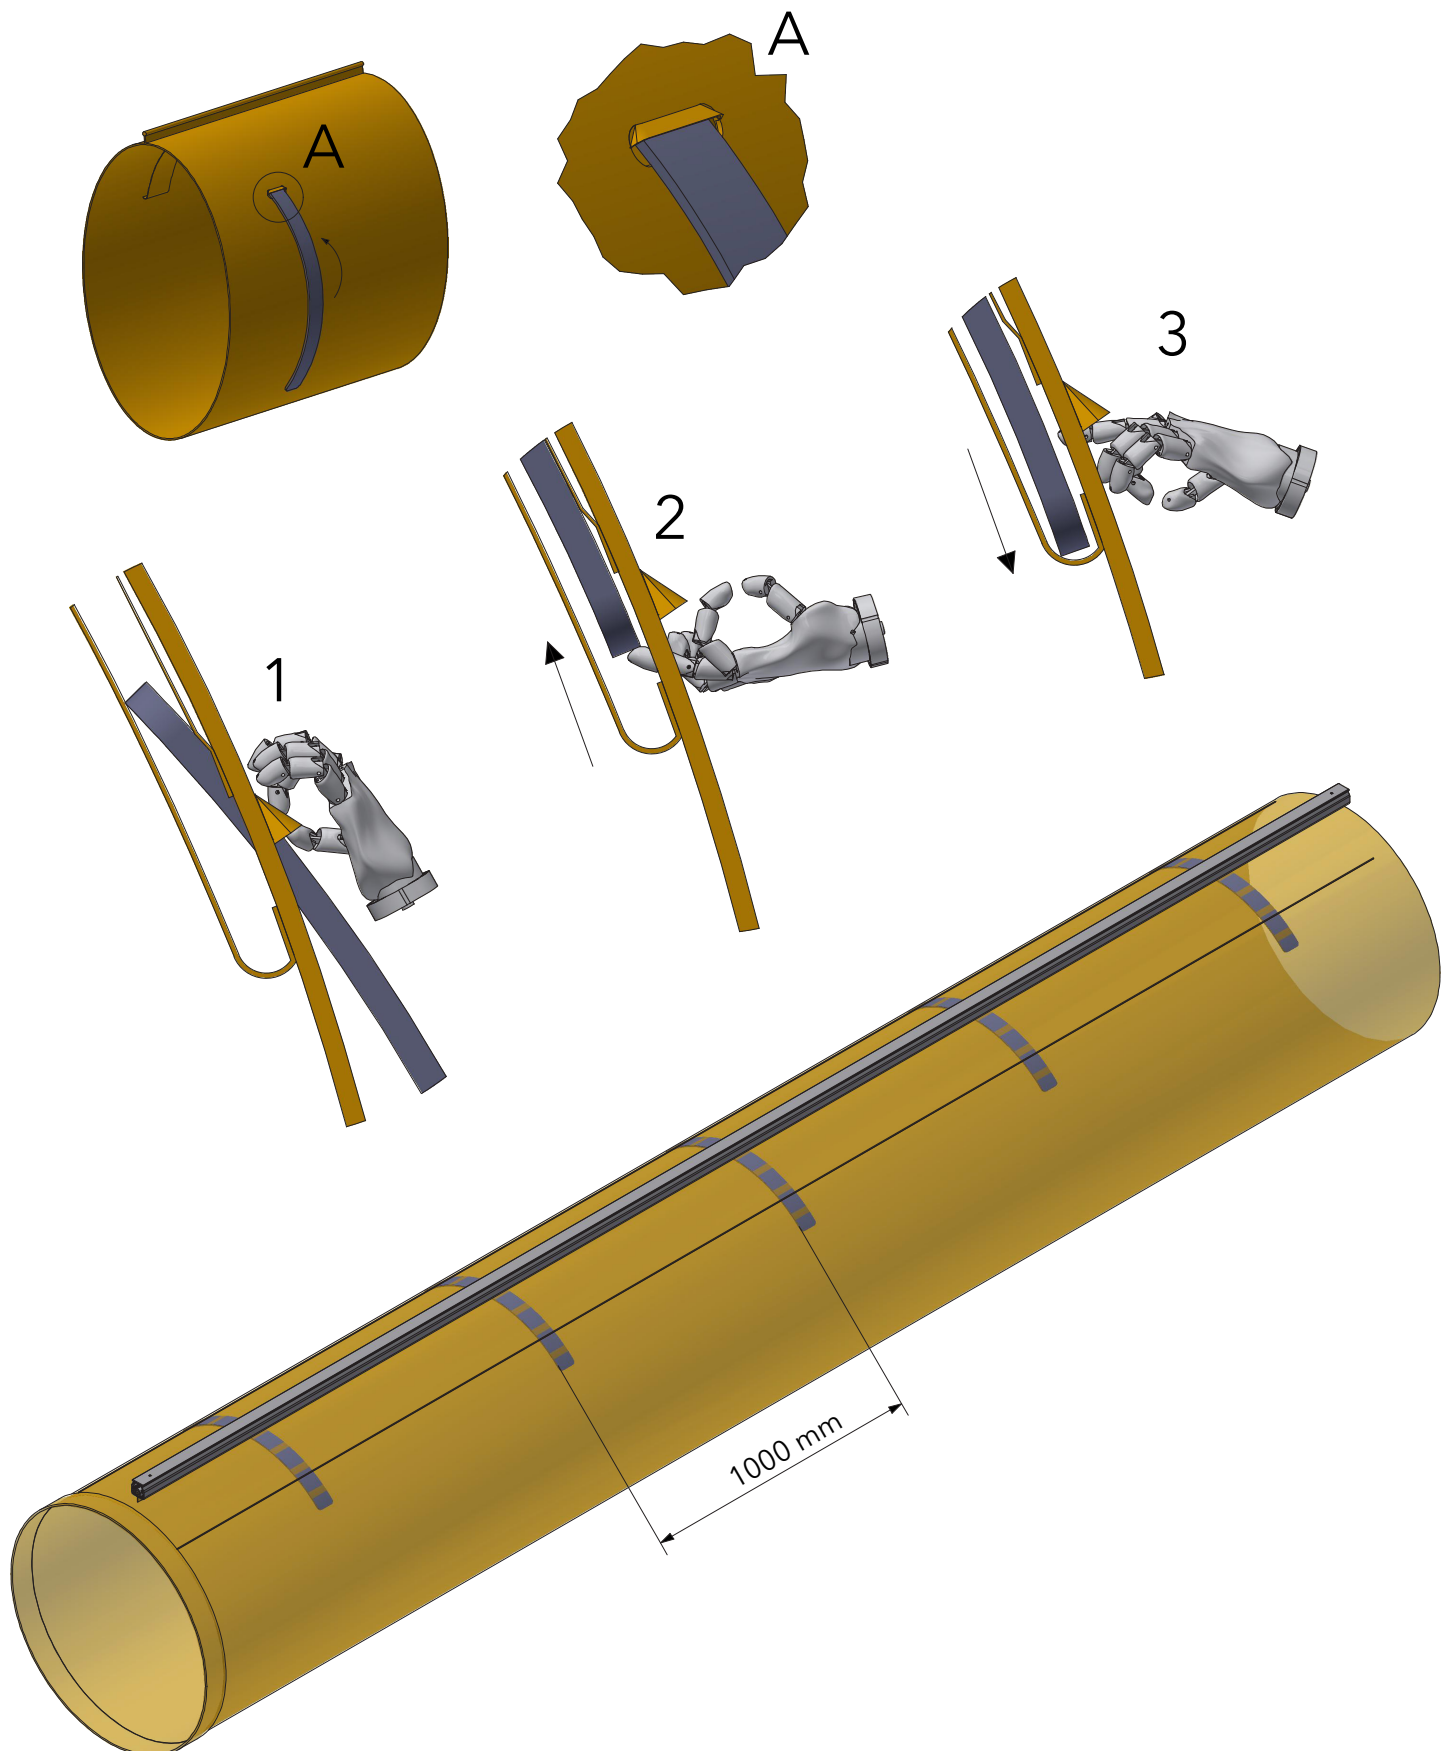


Safetrack MountEasy One End


OS-0018-GB-04

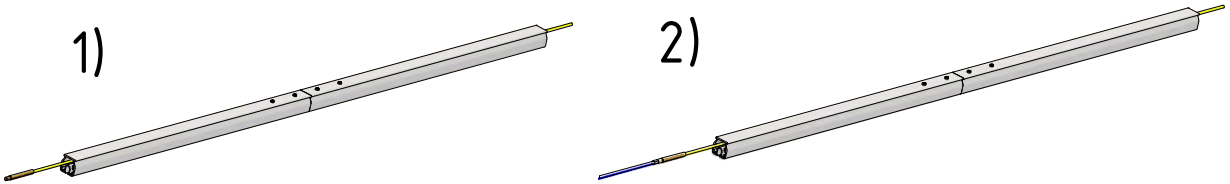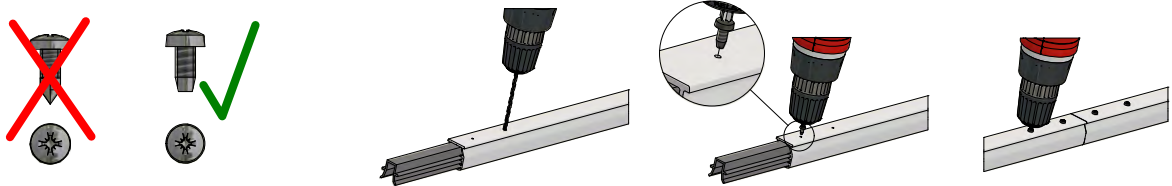


2)

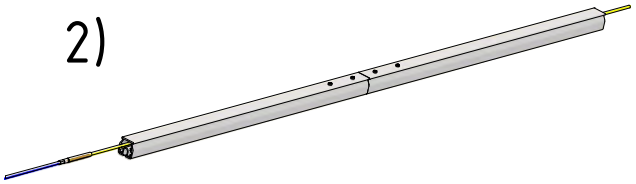


3)

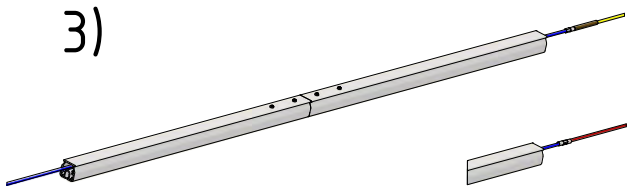


4)

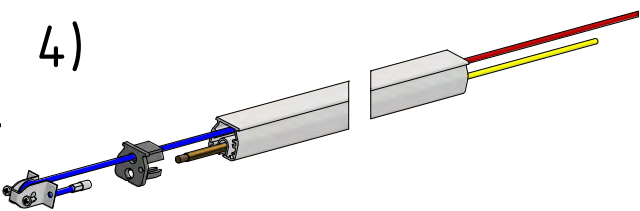


4a)




4b)

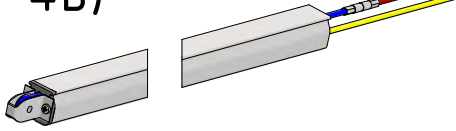


4c)

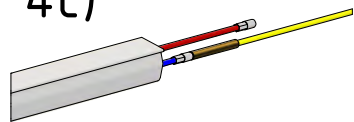


5)

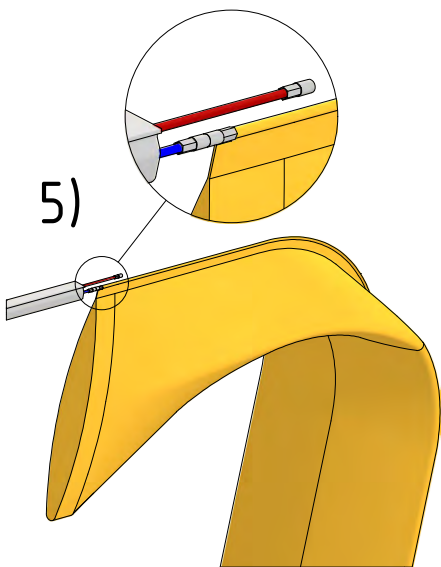

5a)

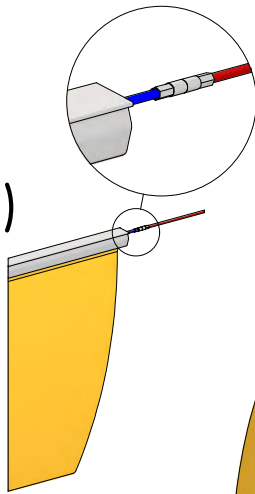

5b)

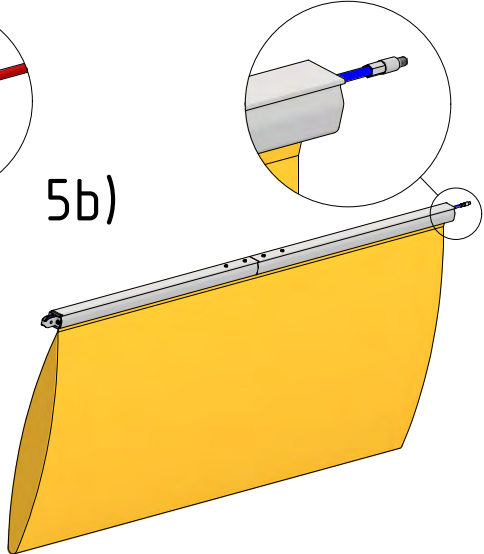

Safetrack MountEasy Two End

OS-0019-GB-04

