


Cable Suspension, Triple WO-0003-US-00

Included as standard: Extra 10 ft cable


For cables shorter than 50 ft we recommend 1 wire lock nut at each end.

For cables longer than 50 ft we recommend 2 wire lock nuts at each end.

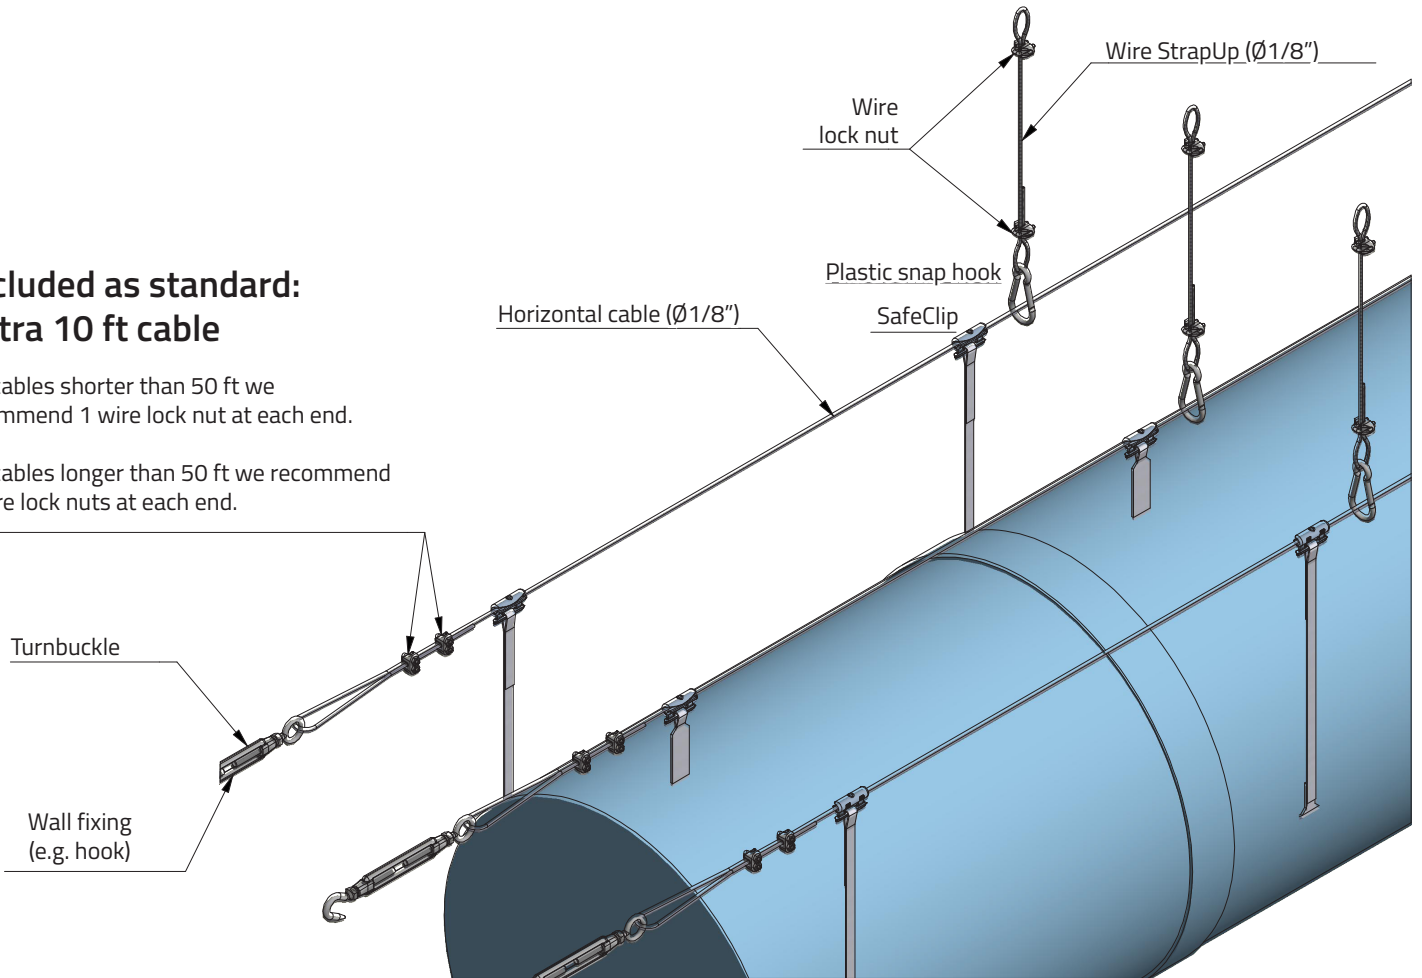


Suspension types

- A. StrapUp with plastic snap hook
- B. StrapUp with snap hook
- C. StrapUp w/Gripping
- D. Plastic snap hook
- E. KE-Clip
- F. SafeClip
- G. Snap hook



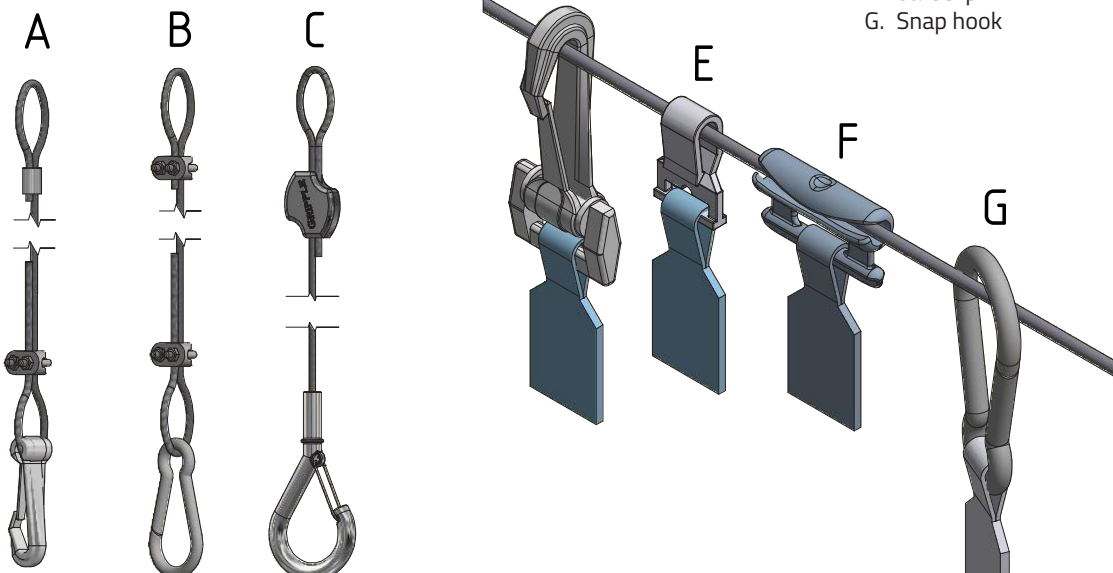


Cable Suspension, Triple (Straight Duct)

WO-0004-US-00

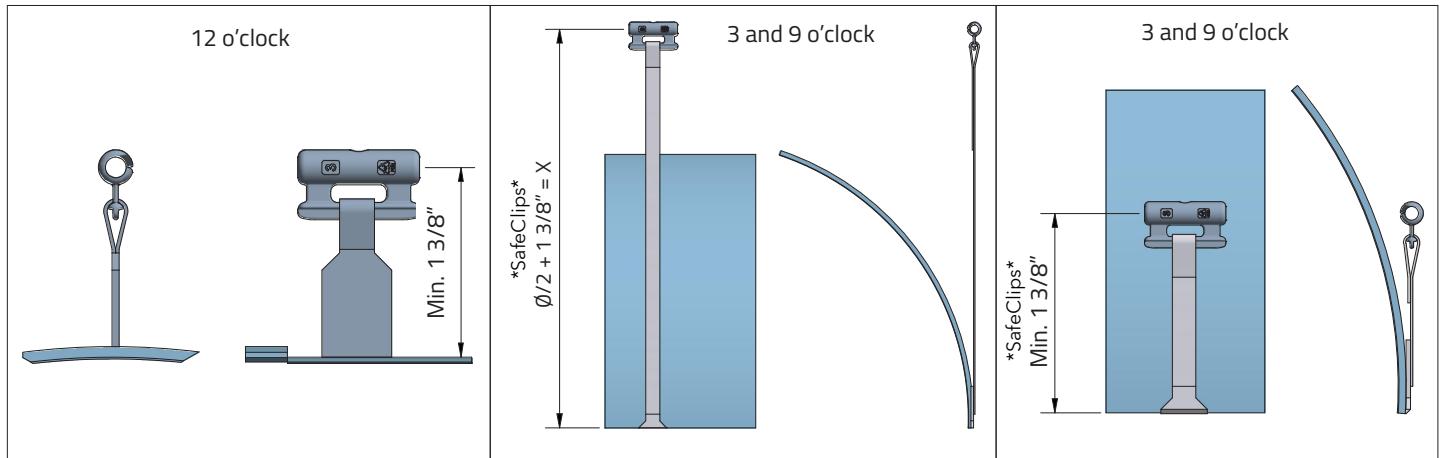


Mount horizontal cables. Apply tension of max. 45 lbs and then tighten lock nut. A turnbuckle turned from fully open to fully tensioned will shorten the cable by approx. 3 2/8". For cables longer than 50 ft we recommend a turnbuckle at each end.

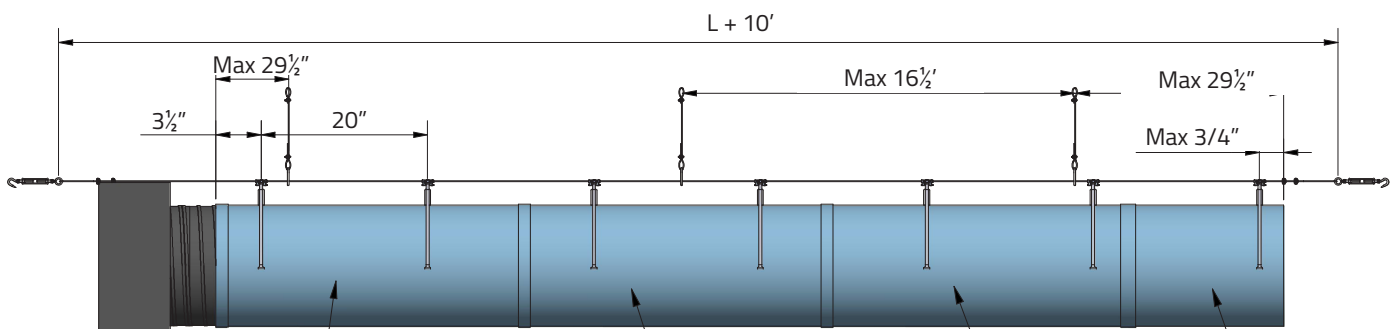
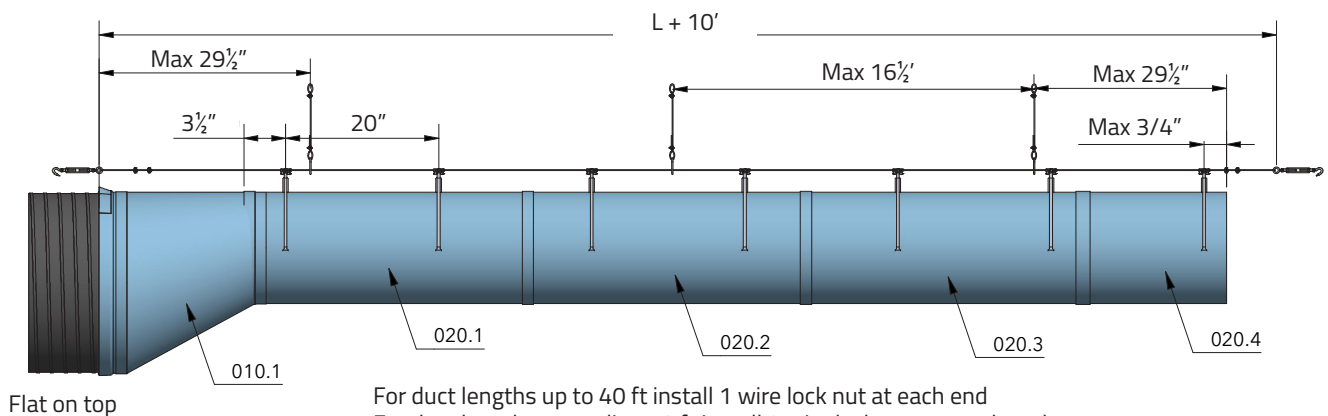
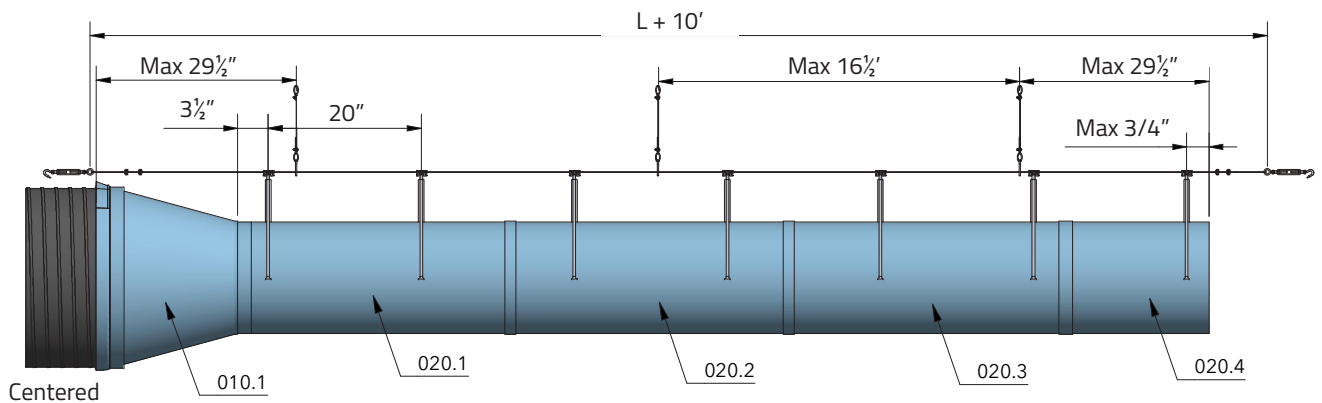


Cable Suspension, Triple (Plenum)

WO-0005-US-00

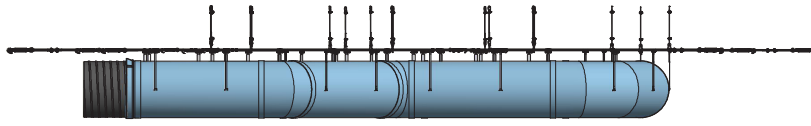


For ducts flat on top exceeding 20" diameter or with same diameter as the plenum, an additional clip is placed at the seam

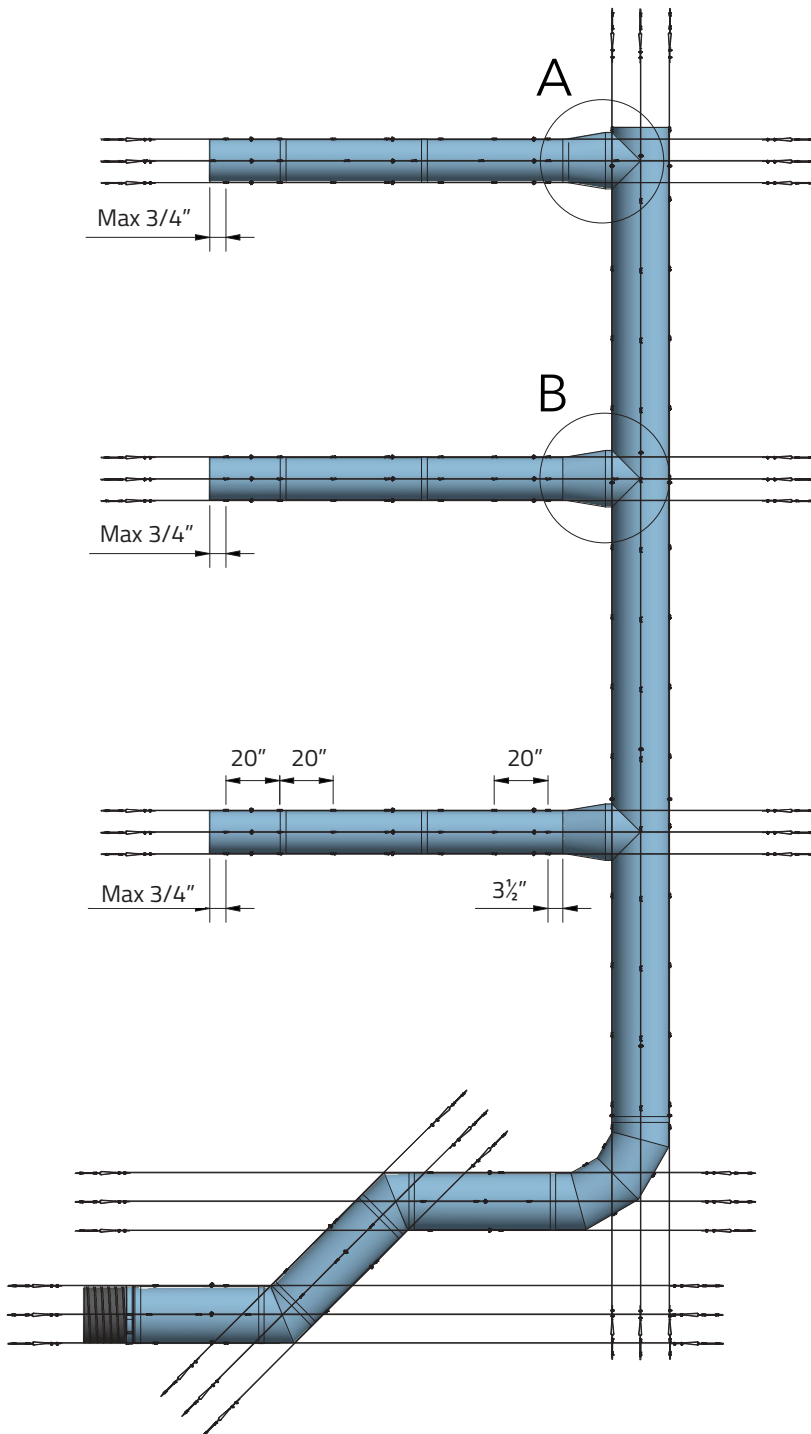


Cable Suspension, Triple, KE-Mitered Elbow

WO-0012-US-00

Mitered elbow - see delivery note for specific angle

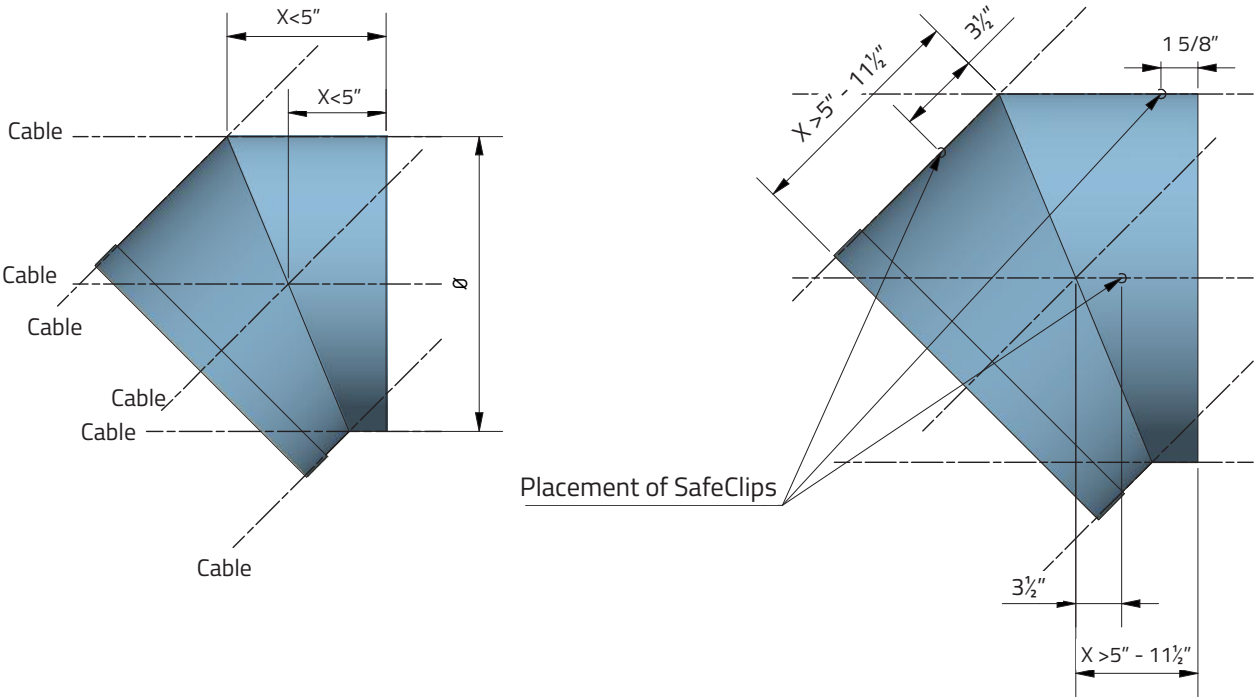



Mitered elbow 90°

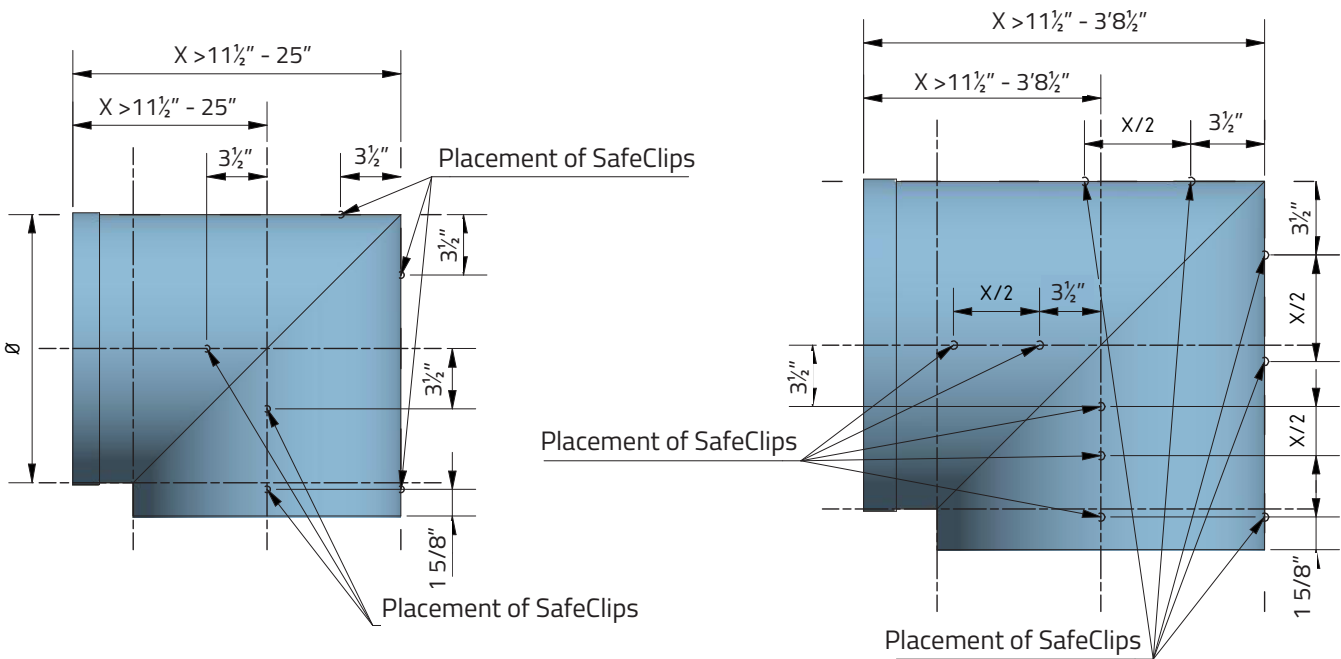

Cable Suspension, Triple, KE-Gored Elbow

WO-0013-US-00

45° gored elbow

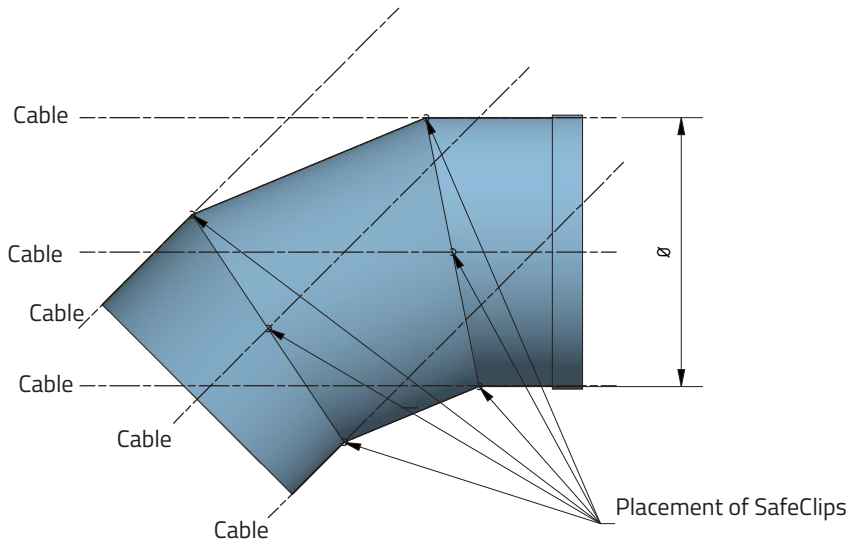

SafeClip
Clip height min. 1 3/8"



Calculation:

$$\text{Ø}/2 + \text{Clip height} = X''$$

$$\text{Ex.: } \text{Ø}16/2 + 1\ 3/8 = 9\ 3/8''$$

Clips to be placed 1 5/8" from external zip.

90° gored elbow

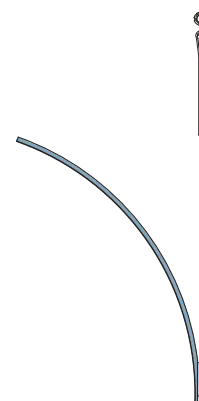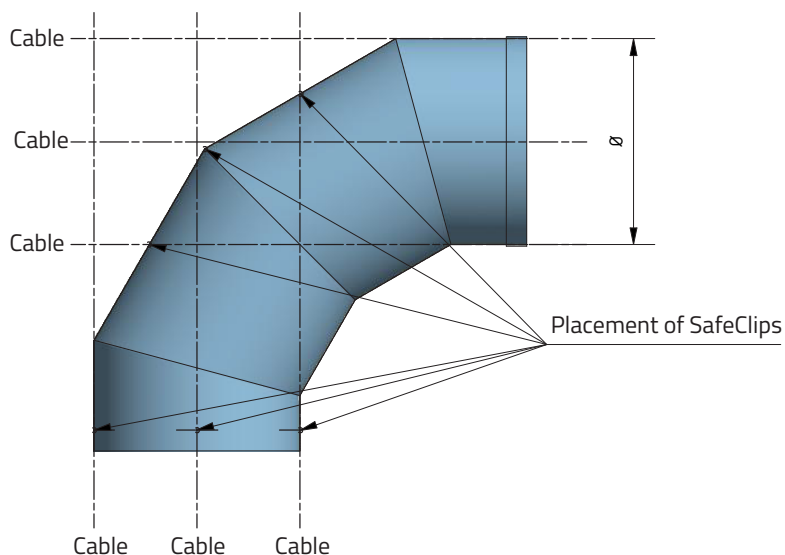

SafeClip
Clip height min. 1 3/8"