


Safe 360°
Mounting System

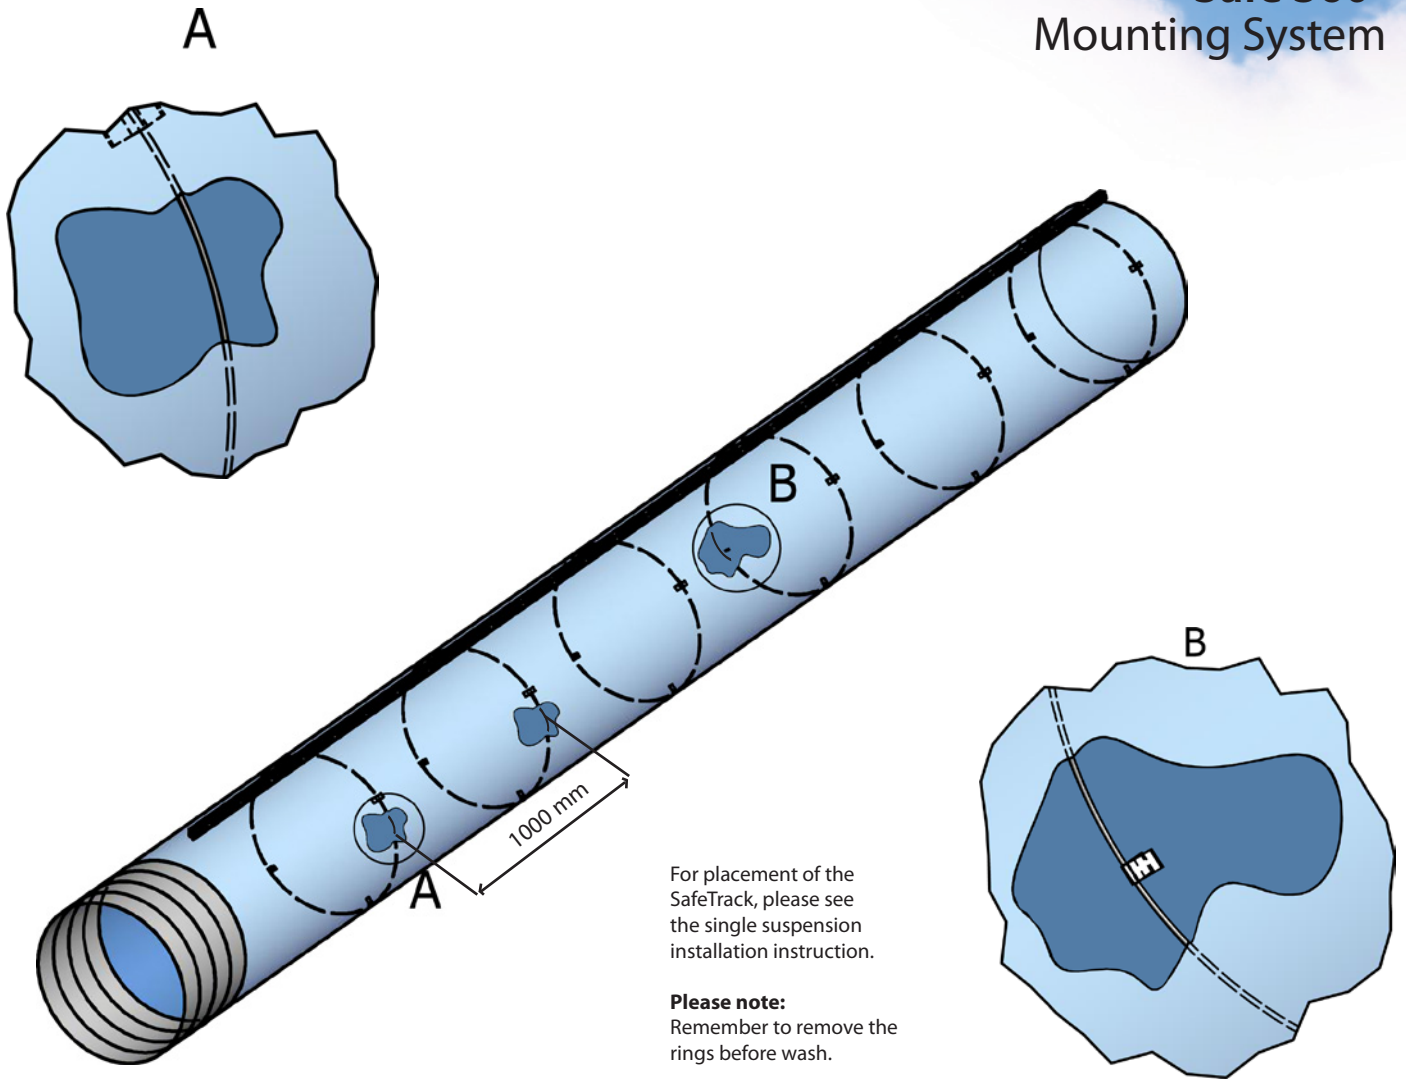


For placement of the SafeTrack, please see the single suspension installation instruction.

Please note:
Remember to remove the rings before wash.

YouTube™



KE Fibertec



Scan the code with your smartphone and watch the installation guide on the KE Fibertec YouTube channel.

- 1 Install the duct according to the standard mounting installation supplied with the duct system.
- 2 The Safe 360° concept consists of stainless steel rings placed internally in the fabric duct for every 1000 mm (A). Ring size is 3 mm for ducts Ø 200 mm up to Ø 630 mm and 4 mm for ducts from Ø 630 mm to Ø 900 mm. The rings are preinstalled from the factory, however, for sizes >630 mm installation must be done on site.
- 3 The rings are held in place by velcro straps (B) for easy removal should maintenance/washing be necessary.

